


AVKOPACK[®] 1730

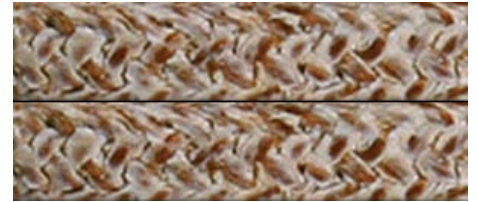

CHARACTERISTICS

Gland packing braided by novoloid fibres, impregnated with PTFE and special oils.

Application

The packing is used for the sealing of plunger and centrifugal pumps, as well as valves. It is widely used in sealing pumps and other facilities that work under continuous pressure. It may be used in sealing armature, but it is mainly designed for pumps.

The packing may be used for sealing in chemical aggressive environments, in water and steam up to 250°C.

AVKOPACK[®] 1730 is widely used for sealing installations and equipment in the chemical, pharmaceutical, food processing industries, in the power supplying industry, etc.

Advantages

The particularity of the synthetic fibre Novoloid and the additional PTFE impregnation guarantee an auspicious work in a wide range of working environments.

Technical parameters

Working temperature:	-50°C / +250°C
Working pressure:	
- for rotary - pumps:	25 bar
- for piston - pumps:	25 bar
- for armature:	80 bar
pH:	1 – 13
V:	10 m/s
Standard dimensions:	from 4 x 4 mm to 25 x 25 mm

Quality Control

The whole production process is supervised in accordance with the Quality System ISO 9001, ISO 14001, OHSAS 18001.

Human hazardous

Not registered.

The information listed in this technical data sheet is based on our company's trials and experience. AVKO JSC is not to be held responsible for poor installation or application in media combining complexity of factors whose total exceeds the general qualities of the product. Our technical and sales representatives will assist any client in need of a product with a peculiar application.